

Фитинги Profipress

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884


Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: vag@nt-rt.ru || сайт: <https://viega.nt-rt.ru/>

TABLE OF CONTENTS

Elbows	4
T-pieces	6
Adapters/elbows	8
Couplings	11
Reductions	12
Screw fittings	13
Caps, plugs	15
Flanges	16
Wall plates	17
Mounting units	19
Wall lead-ins	20
Smartloop inliner technology: internal circulation pipes	21
Compensators	22
Gunmetal shut-off valves, from 2017	22
Gunmetal ball valves	23
Gunmetal ball valves, from 2017	24
Free-flow valves, from 2017	25
Concealed free-flow valves, concealed straight seat valves, from 2017	25
Manifolds, cross pieces	26
Radiator connections	27
Skirting board radiator connection pieces	31
Accessories	
Tools	33
Sealing elements	33



ELBOWS



Profipress Elbow 90° with SC-Contur

- copper
- press connections

Components

EPDM sealing elements

Model 2416

VdS	d	PU	Article	DG
	12	10	291 488	86
	15	10/100	291 501	86
✓	22	10/100	291 518	86
✓	28	5/50	291 525	86
✓	35	5	291 532	86
✓	42	5	291 549	86
✓	54	1	291 556	86

VdS = VdS certification



Profipress XL Elbow 90° with SC-Contur

- copper
- press connections

Components

EPDM sealing elements, cutting rings, separator rings

Model 2416XL

d	PU	Article	DG
66.7	1	645 137	67
76.1	1	476 847	67
108.0	1	476 861	67



Profipress Elbow 90° with SC-Contur

- copper
- plug-in end, press connection

Components

EPDM sealing element

Model 2416.1

VdS	d	PU	Article	DG
	12	10	291 648	86
	15	10/100	291 662	86
✓	22	10/100	291 679	86
✓	28	5/50	291 686	86
✓	35	5	291 693	86
✓	42	5	291 709	86
✓	54	1	291 716	86

VdS = VdS certification



Profipress XL Elbow 90° with SC-Contur

- copper
- plug-in end, press connection

Components

EPDM sealing element, cutting ring, separator ring

Model 2416.1XL

d	PU	Article	DG
66.7	1	648 350	67
76.1	1	476 878	67
108.0	1	476 892	67



Profipress Elbow 45° with SC-Contur

F/F

- copper
- press connections

Components

EPDM sealing elements

Model 2426

VdS	d	PU	Article	DG
	12	10	292 409	86
	15	10/100	292 348	86
✓	22	10/100	292 355	86
✓	28	5/50	292 362	86
✓	35	5	292 379	86
✓	42	5	292 386	86
✓	54	1	292 393	86

VdS = VdS certification



Profipress XL Elbow 45° with SC-Contur

- copper
- press connections

Components

EPDM sealing elements, cutting rings, separator rings

Model 2426XL

d	PU	Article	DG
66.7	1	645 144	67
76.1	1	476 908	67
108.0	1	476 922	67

Profipress with SC-Contur A1



Profipress Elbow 45° with SC-Contur
 - copper
 - plug-in end, press connection
Components
 EPDM sealing element
Model 2426.1

VdS	d	PU	Article	DG
	12	10	292 577	86
	15	10/100	292 508	86
✓	22	10/100	292 515	86
✓	28	5/50	292 522	86
✓	35	5	292 539	86
✓	42	5	292 546	86
✓	54	1	292 553	86

VdS = VdS certification



Profipress XL Elbow 45° with SC-Contur
 - copper
 - plug-in end, press connection
Components
 EPDM sealing element, cutting ring, separator ring
Model 2426.1XL

d	PU	Article	DG
66.7	1	648 367	67
76.1	1	476 939	67
108.0	1	476 953	67



Profipress Crossover with SC-Contur
 - copper
 - plug-in end, press connection
Components
 EPDM sealing element
Model 2427

d	PU	Article	DG
12	10	322 359	86
15	10	322 342	86
22	10	322 328	86



Profipress Crossover with SC-Contur
 - copper
 - press connections
Components
 EPDM sealing elements
Model 2428

d	PU	Article	DG
15	10	352 134	86
22	10	352 158	86

T-PIECES



Profipress T-piece with SC-Contur

- copper
- press connections

Components

EPDM sealing elements

Model 2418

VdS	d1	d2	d3	PU	Article	DG
	12	12	12	10	291 884	86
	12	15	12	10	322 717	86
	15	12	12	10	291 907	86
	15	12	15	10	291 914	86
	15	15	12	5	315 085	86
	15	15	15	10/100	291 952	86
	15	22	15	10	322 700	86
	22	12	22	10	324 834	86
	22	15	15	10	292 010	86
	22	15	22	10/50	292 027	86
	22	22	15	5	315 047	86
✓	22	22	22	10/100	291 969	86
	28	15	22	5	324 841	86
	28	15	28	5/50	295 189	86
✓	28	22	22	5	307 899	86
✓	28	22	28	5	295 196	86
✓	28	28	22	5	315 016	86
✓	28	28	28	5/50	291 976	86
	35	15	35	5	324 865	86
✓	35	22	28	5	324 889	86
✓	35	22	35	5	292 034	86
✓	35	28	28	5	324 896	86
✓	35	28	35	5	292 041	86
✓	35	35	22	5	365 882	86
✓	35	35	28	5	365 080	86
✓	35	35	35	5	291 983	86
✓	42	22	42	5	324 902	86
✓	42	28	42	5	292 058	86
✓	42	35	42	5	292 065	86
✓	42	42	42	5	291 990	86
✓	54	22	54	1	324 919	86
✓	54	28	54	1	324 926	86
✓	54	35	54	1	324 933	86
✓	54	42	54	1	292 072	86
✓	54	54	54	1	292 003	86

VdS = VdS certification



Sanpress T-piece with SC-Contur

- gunmetal or silicon bronze
- press connections

Components

EPDM sealing elements

Model 2218

VdS	d1	d2	d3	PU	Article	DG
	28	28	15	5	314 132	87
	28	28	18	5	314 163	87
	42	15	42	1	314 224	87
✓	42	35	35	1	283 551	87
✓	54	42	42	1	187 279	87

VdS = VdS certification



Profipress T-piece with SC-Contur

- copper
- press connections, plug-in end

Components

EPDM sealing elements

Model 2418.1

d1	d2	d3	PU	Article	DG
22	15	22	5	477 356	86



Profipress XL T-piece with SC-Contur

- copper
- press connections

Components

EPDM sealing elements, cutting rings, separator rings

Model 2418XL

d1	d2	d3	PU	Article	DG
66.7	28	66.7	1	648 411	67
66.7	35	66.7	1	648 381	67
66.7	42	66.7	1	648 404	67
66.7	54	66.7	1	648 398	67
66.7	66.7	66.7	1	648 374	67
76.1	54	76.1	1	476 977	67
76.1	66.7	76.1	1	719 234	67
76.1	76.1	76.1	1	476 960	67
108.0	54	108.0	1	477 028	67
108.0	76.1	108.0	1	477 035	67
108.0	108.0	108.0	1	477 011	67



Sanpress T-piece with SC-Contur
 - gunmetal or silicon bronze
 - press connections, R-thread
Components
 EPDM sealing elements
Model 2217.1

d1	R	d2	PU	Article	DG
22	3/4	22	5	194 123	87
28	3/4	28	5	194 130	87
35	3/4	35	5	194 147	87
42	3/4	42	1	273 231	87
54	3/4	54	1	197 858	87
54	1	54	1	310 929	87
54	1 1/4	54	1	310 936	87



Sanpress T-piece with SC-Contur
 - gunmetal or silicon bronze
 - press connections, Rp-thread
Components
 EPDM sealing elements, polygon
Model 2217.2

VdS	d1	Rp	d2	PU	Article	DG
	12	1/2	12	5	290 986	87
	15	3/8	15	5	313 951	87
	15	1/2	15	5	115 630	87
	18	1/2	18	5	281 359	87
✓	22	1/2	22	5	115 944	87
✓	22	3/4	22	5	313 975	87
✓	28	1/2	28	5	119 768	87
✓	28	3/4	28	5	313 968	87
✓	35	1/2	35	5	121 945	87
✓	35	1	35	1	361 204	87
✓	42	1/2	42	1	126 230	87
✓	42	1	42	1	361 211	87
✓	54	1/2	54	1	197 353	87
✓	54	1	54	1	361 228	87

VdS = VdS certification



Sanpress T-piece G1/4, with plug-in end with SC-Contur
 - for extraction valve, drainage valve, sampling point for retrofitted installation in piping, connection of drainage valve with access to ball valve
 - gunmetal or silicon bronze
 - press connection, plug-in end, G-thread
Components
 EPDM sealing element
Note
 In piping that use Sanpress slip coupling model 2215.5.
Model 2217.4

d1	G	d2	PU	Article	DG
15	1/4	15	1	705 596	87
18	1/4	18	1	705 602	87
22	1/4	22	1	705 619	87
28	1/4	28	1	705 626	87
35	1/4	35	1	705 633	87
42	1/4	42	1	705 640	87
54	1/4	54	1	705 855	87



Profipress XL T-piece with SC-Contur
 - copper
 - press connections, Rp-thread
Components
 EPDM sealing elements, cutting rings, separator rings, polygon
Model 2417.2XL

d1	Rp	d2	PU	Article	DG
76.1	3/4	76.1	1	534 073	67
76.1	2	76.1	1	534 080	67
108.0	3/4	108.0	1	534 110	67
108.0	2	108.0	1	534 127	67

ADAPTERS/ELBOWS



Sanpress Adapter with SC-Contur

- gunmetal or silicon bronze
- press connection, R-thread

Components

EPDM sealing element, polygon

Model 2211

VdS	d	R	PU	Article	DG
	12	3/8	5	290 771	87
	12	1/2	5	290 764	87
	15	3/8	5	297 985	87
	15	1/2	5/100	105 044	87
	15	3/4	5	287 764	87
✓	22	1/2	5	297 961	87
✓	22	3/4	5	104 306	87
✓	22	1	5	287 771	87
✓	28	3/4	5	297 954	87
✓	28	1	5	106 508	87
✓	28	1 1/4	5	297 978	87
✓	35	1	5	297 947	87
✓	35	1 1/4	5	110 352	87
✓	35	1 1/2	5	314 651	87
✓	42	1 1/4	5	297 930	87
✓	42	1 1/2	1	115 340	87
✓	54	1 1/2	1	314 668	87
✓	54	2	1	195 267	87

VdS = VdS certification



Sanpress Adapter

- press connection, NPT male pipe thread

Components

EPDM sealing element, polygon

Model 2211.2

d	NPT	PU	Article	DG
15	1/2	5	493 851	87
22	3/4	5	493 868	87
28	1	5	493 875	87
35	1 1/4	5	493 882	87
42	1 1/2	1	493 899	87
54	2	1	493 905	87



Sanpress Adapter with SC-Contur

- for connection screw fitting
- gunmetal or silicon bronze
- press connection, G-thread

Components

EPDM sealing element, polygon

Model 2211.4

d	G	PU	Article	DG
15	1/2	5	660 222	87



Profipress XL Adapter with SC-Contur

- copper
- press connection, R-thread

Model 2411XL

d	R	PU	Article	DG
66.7	2 1/2	1	648 510	67
76.1	2 1/2	1	534 134	67
108.0	4	1	534 158	67



Sanpress Adapter with SC-Contur

- gunmetal or silicon bronze
- press connection, Rp-thread

Components

EPDM sealing element, polygon

Model 2212

VdS	d	Rp	PU	Article	DG
	12	3/8	5	291 075	87
	12	1/2	5	291 068	87
	15	3/8	5	298 074	87
	15	1/2	5	107 543	87
	15	3/4	5	298 098	87
✓	22	1/2	5	298 067	87
✓	22	3/4	5	108 465	87
✓	22	1	5	298 128	87
✓	28	1/2	5	428 174	87
✓	28	3/4	5	298 081	87
✓	28	1	5	114 329	87
✓	28	1 1/4	5	298 104	87
✓	35	3/4	5	357 542	87
✓	35	1	5	298 111	87
✓	35	1 1/4	5	116 774	87
✓	42	1 1/4	1	298 050	87
✓	42	1 1/2	1	124 236	87
✓	54	1 1/2	1	365 097	87
✓	54	2	1	195 304	87

VdS = VdS certification

Profipress with SC-Contur A1



Sanpress Adapter

- gunmetal or silicon bronze
- press connection, NPT male pipe thread

Components

EPDM sealing element, polygon

Model 2212.2

d	NPT	PU	Article	DG
15	1/2	5	493 912	87



Profipress XL Adapter with SC-Contur

- copper
- press connection, Rp-thread

Components

EPDM sealing element, cutting ring, separator ring, polygon

Model 2412XL

d	Rp	PU	Article	DG
66.7	2 1/2	1	648 527	67



Sanpress Adapter with SC-Contur

- gunmetal or silicon bronze
- press connection, Rp-thread

Components

EPDM sealing element, anti-twist protection

Model 2212.3

d	Rp	PU	Article	DG
15	1/2	5	287 016	87
18	1/2	5	298 913	87
22	1/2	5	287 009	87



Sanpress Adapter union with SC-Contur

- for steel pipe to Viega press connector systems
- gunmetal or silicon bronze
- compression fitting, press connection

Components

gasket, separator ring, clamping ring, union nut screw fitting, EPDM sealing element, polygon

Model 2215.6

DN	d	PU	Article	DG
25	28	1	588 564	87
32	35	1	588 328	87



Megapress Adapter with SC-Contur

potable water installation

- for steel pipes in accordance with EN 10220/10255 with galvanizing in accordance with EN 10240
- silicon bronze
- press connections

Components

EPDM sealing elements, cutting ring, separator ring

Model 4213.2

DN	D	d	PU	Article	DG
15	1/2	15	5	736 255	55
15	1/2	18	5	754 679	55
20	3/4	22	5	736 279	55
25	1	28	5	736 293	55
32	1 1/4	35	1	736 309	55
40	1 1/2	42	1	736 316	55
50	2	54	1	736 323	55



Sanpress Plug-in piece

- gunmetal or silicon bronze
- plug-in end, R-thread

Components

polygon

Model 2211.1

d	R	PU	Article	DG
12	1/2	5	291 310	87
15	1/2	5	115 418	87
18	1/2	5	285 081	87
18	3/4	5	285 104	87
22	1/2	5	119 676	87
22	3/4	5	116 767	87
28	1	5	122 034	87
35	1 1/4	5	125 288	87
42	1 1/2	1	132 231	87



Sanpress Plug-in piece
 - gunmetal or silicon bronze
 - plug-in end, Rp-thread
Components
 polygon
Model 2212.1

d	Rp	PU	Article	DG	
12	1/2	5	291 341	87	
15	1/2	5	117 733	87	
18	1/2	5	287 085	87	
18	3/4	5	287 108	87	
22	1/2	5	120 917	87	
22	3/4	5	117 481	87	
28	3/4	5	130 954	87	
28	1	5	122 942	87	
35	1	5	134 730	87	
35	1 1/4	5	130 589	87	
42	1 1/2	1	135 430	87	
54	2	1	199 104	87	



Sanpress Adapter elbow 90° with SC-Contur
 - gunmetal or silicon bronze
 - press connection, R-thread
Components
 EPDM sealing element, polygon
Model 2214

d	R	PU	Article	DG	
12	3/8	5	290 863	87	
12	1/2	5	290 870	87	
15	3/8	5	314 361	87	
15	1/2	5	112 950	87	
15	3/4	5	443 030	87	
22	3/4	5	115 623	87	
28	1	5	118 730	87	
35	1 1/4	5	127 329	87	
42	1 1/2	1	128 500	87	
54	2	1	197 988	87	



Sanpress Adapter elbow 90° with SC-Contur
 - gunmetal or silicon bronze
 - press connection, R-thread
Components
 EPDM sealing element
Model 2214.1

d	R	PU	Article	DG	
15	1/2	5	335 281	87	



Sanpress Adapter elbow 90° with SC-Contur
 - gunmetal or silicon bronze
 - press connection, Rp-thread
Components
 EPDM sealing element
Model 2214.2

d	Rp	PU	Article	DG	
12	3/8	5	290 924	87	
12	1/2	5	290 931	87	
15	3/8	5	298 241	87	
15	1/2	5	108 441	87	
15	3/4	5	314 385	87	
22	1/2	5	298 234	87	
22	3/4	5	283 711	87	
22	1	5	314 378	87	
28	1/2	5	442 033	87	
28	3/4	5	446 611	87	
28	1	5	283 728	87	
35	1 1/4	5	283 704	87	
42	1 1/2	1	299 415	87	
54	2	1	299 422	87	



Sanpress Plug-in elbow 90°
 - gunmetal or silicon bronze
 - plug-in end, Rp-thread
Model 2214.3

d	Rp	PU	Article	DG	
15	1/2	5	308 001	87	

COUPLINGS


Profipress Coupling with SC-Contur

- copper
- press connections
- Components**
- EPDM sealing elements
- Model 2415**

VdS	d	PU	Article	DG
	12	10	292 737	86
	15	10/100	292 690	86
✓	22	10/100	292 683	86
✓	28	5/50	292 676	86
✓	35	5	292 706	86
✓	42	5	292 713	86
✓	54	1	292 720	86

VdS = VdS certification


Profipress XL Coupling with SC-Contur

- copper
- press connections
- Components**
- EPDM sealing elements, cutting rings, separator rings
- Model 2415XL**

d	PU	Article	DG
66.7	1	648 435	67
76.1	1	477 059	67
108.0	1	477 073	67


Profipress Slip coupling with SC-Contur

- copper
- press connections
- Components**
- EPDM sealing elements
- Model 2415.3**

d	PU	Article	DG
12	10	713 416	86
15	10	461 256	86
22	10	461 270	86
28	5	461 287	86
35	5	461 294	86
42	5	461 317	86
54	1	461 300	86


Profipress XL Slip coupling with SC-Contur

- copper
- Components**
- EPDM sealing elements, cutting rings, separator rings
- Model 2415.5XL**

d	PU	Article	DG
66.7	1	648 442*	67
76.1	1	477 080	67
108.0	1	477 103	67

* = Discontinued, limited availability


Sanpress Slip coupling with SC-Contur

- gunmetal or silicon bronze
- press connections
- Components**
- EPDM sealing elements
- Model 2215.5**

VdS	d	PU	Article	DG
	15	5	119 485	87
	18	5	287 061	87
✓	22	5	119 041	87
✓	28	5	122 133	87
✓	35	5	124 335	87
✓	42	1	131 494	87
✓	54	1	216 153	87

VdS = VdS certification


Sanpress Slip coupling with SC-Contur

- gunmetal or silicon bronze
- plug-in end, press connection
- Components**
- EPDM sealing element
- Model 2215.4**

d	PU	Article	DG
22	5	588 533	87
28	5	588 540	87
35	5	588 557	87


Sanpress Coupling

- gunmetal
- press connections
- Components**
- EPDM sealing elements
- Model 9777.9**

d	PU	Article	DG
10	20	335 946¹⁾	76

¹⁾ Press connection d10 should be carried out with a size 12 press jaw.

REDUCTIONS



Profipress Reducer with SC-Contur

- copper
- plug-in end, press connection

Components

EPDM sealing element

Model 2415.1

VdS	d1	d2	PU	Article	DG
	15	12	10	296 414	86
	22	15	10/50	296 377	86
	28	15	5	296 469	86
✓	28	22	10/50	296 506	86
✓	35	22	5	296 452	86
✓	35	28	5	296 490	86
✓	42	22	5	296 445	86
✓	42	28	5	296 483	86
✓	42	35	5	296 476	86
✓	54	28	5	366 476	86
✓	54	35	5	296 438	86
✓	54	42	5	296 421	86

VdS = VdS certification



Profipress XL Reducer with SC-Contur

- copper
- plug-in end, press connection

Components

EPDM sealing element, cutting ring, separator ring

Model 2415.1XL

d1	d2	PU	Article	DG
66.7	28	1	648 473	67
66.7	35	1	648 480*	67
66.7	42	1	648 466*	67
66.7	54	1	648 459	67
76.1	54	1	477 110	67
76.1	66.7	1	719 241	67
108.0	54	1	477 141	67
108.0	66.7	1	648 497	67
108.0	76.1	1	477 158	67

* = Discontinued, limited availability



Sanpress Reducer with SC-Contur

- gunmetal or silicon bronze
- plug-in end, press connection

Components

EPDM sealing element

Model 2215.1

d1	d2	PU	Article	DG
22	12	5	366 865	76



Profipress Reducing coupling with SC-Contur

- copper
- press connections

Components

EPDM sealing elements

Model 2415.2

VdS	d1	d2	PU	Article	DG
	15	12	10	325 770	86
	22	15	10	325 794	86
✓	28	22	5	325 817	86
✓	35	28	5	328 269	86
✓	42	35	1	328 252	86
✓	54	42	1	328 276	86

VdS = VdS certification



Sanpress Reducing coupling

- gunmetal
- press connections

Components

EPDM sealing elements

Model	d1	d2	PU	Article	DG
9778.0	12	10	1	335 953¹⁾	76
9778.1	15	10	10	335 960¹⁾	76

¹⁾ Press connection d10 should be carried out with a size 12 press jaw.


Profipress Reducing elbow 90° with SC-Contur

- copper
- plug-in end, press connection

Components

EPDM sealing element

Model 2416.2

d1	d2	PU	Article	DG
15	12	5	629 281	86


SCREW FITTINGS

Sanpress Screw fitting with SC-Contur

- gunmetal or silicon bronze
- press connections
- flat sealing

Components

EPDM sealing elements, EPDM flat gasket, union nut screw fitting, polygon

Note

The union nut consists of brass.

Model 2260

d	PU	Article	DG
12	5	293 017	87
15	1	126 148	87
18	1	287 436	87
22	1	126 124	87
28	1	124 311	87
35	1	130 947	87
42	1	132 446	87
54	1	226 329	87


Sanpress Adapter union with SC-Contur

- gunmetal or silicon bronze
- press connection, Rp-thread
- flat sealing

Components

EPDM sealing element, EPDM flat gasket, union nut screw fitting, polygon

Note

The union nut consists of brass.

Model 2262

d	Rp	PU	Article	DG
12	1/2	5	293 024	87
15	1/2	1	131 937	87
15	3/4	1	133 160	87
18	1/2	1	283 384	87
18	3/4	1	314 910	87
22	3/4	1	125 318	87
22	1	1	133 900	87
28	3/4	1	365 103	87
28	1	1	128 975	87
35	1 1/4	1	138 875	87
42	1 1/2	1	141 745	87
54	2	1	222 017	87


Sanpress Adapter union with SC-Contur

- gunmetal or silicon bronze
- press connection, R-thread
- flat sealing

Components

EPDM sealing element, EPDM flat gasket, union nut screw fitting, polygon

Note

The union nut consists of brass.

Model 2265

d	R	PU	Article	DG
12	3/8	5	291 372	87
12	1/2	5	291 389	87
15	1/2	1	120 108	87
15	3/4	1	140 878	87
18	1/2	1	283 360	87
18	3/4	1	283 377	87
22	1/2	1	142 674	87
22	3/4	1	119 133	87
22	1	1	148 492	87
28	3/4	1	365 110	87
28	1	1	120 047	87
35	1 1/4	1	128 425	87
42	1 1/2	1	135 966	87
54	2	1	221 997	87


Sanpress Adapter union 90° with SC-Contur

- gunmetal or silicon bronze
- press connection, Rp-thread
- flat sealing, angled

Components

EPDM sealing element, EPDM flat gasket, union nut screw fitting, polygon

Note

The union nut consists of brass.

Model 2255

d	Rp	PU	Article	DG
12	1/2	5	292 980*	87
15	1/2	5	125 660	87
18	1/2	5	283 469	87
18	3/4	5	283 452	87
22	3/4	5	122 614	87
22	1	5	132 637	87
28	1	5	128 159	87
35	1 1/4	5	132 729	87
42	1 1/2	1	139 872	87
54	2	1	221 676	87

* = Discontinued, limited availability


Connection screw fitting with SC-Contur

- gunmetal or silicon bronze
- press connection, G-thread
- flat sealing

Components

EPDM sealing element, EPDM flat gasket, union nut screw fitting, polygon

Model 2263

VdS	d	G	PU	Article	DG
	12	3/8	1	475 956	87
	12	1/2	1	380 878	87
	12	3/4	1	293 611	87
	15	3/8	1	475 963	87
	15	1/2	1	380 885	87
	15	3/4	1	265 663	87
	15	1	1	305 000	87
	15	1 1/4	1	424 534	87
	22	3/4	1	351 502	87
✓	22	1	1	265 687	87
✓	22	1 1/4	1	367 015	87
✓	22	1 1/2	1	305 260	87
	28	1	1	692 629	87
✓	28	1 1/4	1	265 700	87
✓	28	1 1/2	1	305 048	87
✓	35	1 1/2	1	265 731	87
✓	35	2	1	305 024	87
✓	42	1 3/4	1	265 304	87
✓	42	2	1	305 031	87
✓	54	2 1/4	1	426 743	87
✓	54	2 3/8	1	265 328	87
✓	54	2 1/2	1	341 961	87
✓	54	2 3/4	1	426 750	87

VdS = VdS certification


Sanpress Connection screw fitting

- gunmetal or silicon bronze
- plug-in end, G-thread
- flat sealing

Components

EPDM flat gasket, union nut screw fitting, polygon

Note

The union nut consists of brass.

Model 2264

d	G	PU	Article	DG
15	3/4	1	338 503	87
18	3/4	1	338 510	87
22	1	1	338 527	87
28	1 1/4	1	338 534	87
35	1 1/2	1	338 541	87
42	1 3/4	1	338 558	87
54	2 3/8	1	338 565	87


Sanpress Insulating union with SC-Contur

- gunmetal or silicon bronze
- Rp-thread, press connection
- flat sealing

Components

EPDM sealing element, EPDM flat gasket, union nut screw fitting, separator ring, polygon

Note

The union nut consists of brass.

Model 2267

Rp	d	PU	Article	DG
1/2	15	1	469 450	87
3/4	15	1	469 467	87
1/2	18	1	469 474	87
3/4	18	1	469 481	87
3/4	22	1	469 498	87
1	22	1	469 504	87
1	28	1	469 511	87
1 1/4	35	1	469 528	87
1 1/2	42	1	469 535	87
2	54	1	469 542	87


Gasket

- for Viega screw fittings with EPDM flat gasket
- EPDM

Model 2263.1-182

for G	internal-Ø	Ø	H	PU	Article	DG
1/2	12	18.5	2	1	443 184	10
3/4	17	24	2	1	342 425	10
1	21	30	2	1	342 418	10
1 1/4	27	39	2	1	342 401	10
1 1/2	35	44.5	2	1	342 395	10
1 3/4	41	50.5	2	1	342 449	10
2	44	56	2	1	446 055	10
2 1/4	52	62	2	1	446 062	10
2 3/8	53	66	2	1	342 388	10
2 1/2	58	70	2	1	342 432	10
2 3/4	62	78	2	1	446 079	10

CAPS, PLUGS



Profipress Cap with SC-Contur
- copper
- press connection
Components
EPDM sealing element
Model 2456

VdS	d	PU	Article	DG
	12	10	349 295	86
	15	10	349 301	86
✓	22	10	349 356	86
✓	28	5	349 349	86
✓	35	5	349 332	86
✓	42	1	349 325	86
✓	54	1	349 318	86

VdS = VdS certification



Profipress XL Cap with SC-Contur
- copper
- press connection, Rp-thread
Components
EPDM sealing element, cutting ring, separator ring, polygon
Model 2456XL

d	PU	Article	DG
76.1	1	534 165	67
108.0	1	534 189	67



Profipress XL Cap with SC-Contur
- copper
- press connection
Components
EPDM sealing element, cutting ring, separator ring
Model 2456.1XL

d	PU	Article	DG
66.7	1	648 428	67



Profipress Plug
- copper
- plug-in end
Model 2457

d	PU	Article	DG
15	10	330 903	86
22	5	314 576	86
28	5	314 569	86
42	1	314 545*	86
54	1	314 538*	86

* = Discontinued, limited availability



Pressure test plug
- for leakage test, temporarily closed piping section
- brass
- compression fitting, hose connection for filling hose
Components
KFE tap, union nut screw fitting
Model 2269

d	PU	Article	DG
12	1	290 801	87
15	1	141 523	87
18	1	289 423	87
22	1	140 557	87
28	1	142 568	87
35	1	144 111	87
42	1	144 999	87
54	1	187 798	87



Sealing element EPDM
- suitable for pressure test plug model 2269
Model 2269.9

for d	internal-Ø	s	PU	Article	DG
35	32,15	3.2	5	754 150	87
42	38.5	3.7	5	754 167	87
54	51,2	4.13	5	754 174	87

FLANGES



Sanpress Flange adapter with SC-Contur

- gunmetal or silicon bronze
- flange adapter, press connection

Components

black powder-coated steel loose flange PN 10/16, EPDM sealing element, mounting bracket

Model 2259.5

DN	d	n	k [mm]	PU	Article	DG
25	28	4	85	1	479 855	87
32	35	4	100	1	479 879	87
40	42	4	110	1	479 886	87
50	54	4	125	1	479 893	87

n = number of holes

k = bolt circle diameter



Profipress XL Flange adapter with SC-Contur

- copper
- flange adapter, press connection

Components

black powder-coated steel loose flange PN 10/16, EPDM sealing element, cutting ring, separator ring

Model 2459.5XL

	DN	d	n	k [mm]	PU	Article	DG
	65	66.7	8	145	1	648 534	67
	65	76.1	8	145	1	534 042	67
NEW	80	76.1	8	160	1	817 985	67
	100	108.0	8	180	1	534 066	67

n = number of holes

k = bolt circle diameter



Sanpress XL Flange PN 16

- gunmetal or silicon bronze
- Rp-thread

Model 2259.2XL

DN	Rp	PU	Article	DG
65	2½	1	641 597	88
80	3	1	641 603	88
100	4	1	641 610	88



Mounting set

- for flange connection
- galvanised steel

Components

4 screws, 8 washers, 4 nuts

Model 2259.7

DN	PN	M	L	PU	Article	DG
20/25	16	12	65	1	494 056	87
32/50	16	16	70	1	494 063	87



Mounting set

- for flange connection
- galvanised steel

Model 2259.7XL

for DN	PN	M	L	PU	Article	DG
65/100	16	16	70	1	494 087¹	87
80/100	6	16	60	1	651 268²	87

¹⁾ with 8 screws, 16 washers and 8 nuts

²⁾ with 4 screws, 8 washers and 4 nuts



Gasket

- AFM 34/2

Model 2259.9

DN	PN	PU	Article	DG
25	16	10	409 128	87
32	16	10	409 135	87
40	16	10	409 142	87
50	16	10	409 258	87



Gasket

- AFM 34/2

Model 2259.9XL

DN	PN	PU	Article	DG
65	16	10	356 293	88
80	16	10	356 309	88
100	16	10	356 316	88

WALL PLATES



Sanpress Wall plate with SC-Contur


- gunmetal or silicon bronze
- press connection, Rp-thread

Components

EPDM sealing element, cuttable connection elbow, fixing flange

Model 2225

d	Rp	L	PU	Article	DG
15	½	45	5/25	116 552	87



Sanpress Wall plate with SC-Contur

- gunmetal or silicon bronze
- press connection, Rp-thread

Components

EPDM sealing element, fixing flange

Model 2225.5

d	Rp	PU	Article	DG
12	½	5	291 013	87
15	½	5/100	107 345	87
22	½	5	335 229	87
22	¾	5	116 057	87



Sanpress Wall plate with SC-Contur

- gunmetal or silicon bronze
- press connection, Rp-thread

Components

EPDM sealing element, spacer, fixing flange

Model 2225.6

d	Rp	PU	Article	DG
15	½	5	347 307	87



Sanpress Double wall plate with SC-Contur

- gunmetal or silicon bronze
- press connections, Rp-thread

Components

EPDM sealing elements, fixing flange

Model 2228.7

d1	Rp	d2	PU	Article	DG
15	½	15	1	687 892	87
18	½	18	1	692 797	87
22	½	22	1	687 908	87



Sanpress Wall plate T-piece with SC-Contur

- gunmetal or silicon bronze
- press connections, Rp-thread

Components

EPDM sealing elements, fixing flange

Model 2217.3

d1	Rp	d2	PU	Article	DG
15	½	15	1	644 864	87
22	½	22	1	625 726	87



Press-in nozzle

- for T-piece of Profipress, Sanpress, and Sanpress Inox systems with branch d15 in customised dimensioned supply lines
- gunmetal or silicon bronze
- plug-in end
- acc. to the Venturi principle

Note

For the water exchange in branched ring systems to rarely used draw-off points up to a length of 15 m (guide value).

Model 2211.5

d	PU	Article	DG
22	1	695 835	87
28	1	695 842	87
35	1	696 252	87
42	1	696 269	87
54	1	696 276	87
64	1	696 283	87


Pressure test plug

- for leakage test
- plastic
- G-thread
- hot water resistant

Components

gasket, metal thread insert

Model 1516.113

G	PU	Article	DG	
3/8	10	116 644	24	
1/2	10	100 766	24	
3/4	10	107 666	24	


Pressure test plug

- plastic
- G-thread

Components

gasket

Model 1516

G	PU	Article	DG	
3/8	10	107 796	24	
1/2	10/100	100 124	24	
3/4	10	102 746	24	


Protective collar

- for wall plate d16xRp1/2
- plastic

Model 2125.59

	PU	Article	DG	
	10	351 496	78	


Silenta Sound absorber

- for wall plate
- rubber

Components

mounting bracket for wall mounting

Model 1412.891

for d	Rp	PU	Article	DG	
15/18	1/2	5	104 801	31	
22	3/4	5	126 384	31	


Sound absorber

- for all Viega wall plates Rp1/2 DN12 and DN15
- rubber

Model 2141.5

	PU	Article	DG	
	1/100	586 713	31	


Sound absorber

- suitable for Sanpress double wall plate model 2228.7, Sanpress Inox double wall plate model 2325.7, Viega Smartpress double wall plate model 6725.7
- rubber

Model 5325.75

d	for d	PU	Article	DG	
16	15/18	5	657 116	31	
20	22	5	660 383	31	


Mounting bracket

- for masonry installation, pre-wall installation, different actual dimensions
- galvanised steel
- sound decoupling

Model 2021.7

DG	PU	Article	DG	
70/100/150	1	651 350	78	

DG = depth gauge


Mounting bracket

- for wall plate fixing
- galvanised steel
- sound decoupling, variable dimensions

Components

rubber panel set

Model 2141.3

DG	PU	Article	DG	
80-150	1	581 701	78	

DG = depth gauge


Mounting bracket

- for lateral fixing
- galvanised steel

Model 2141.4

	PU	Article	DG
	1	586 706	78


Waste elbow 90°

- for fixing with fitting holder or Viega Mono surface-mounted fitting pre-wall block
- plastic

Components

mounting bracket, WB pre-wall clip, rubber nipple DN40/30, plug

Model 2125.9

DN	PU	Article	DG
40/50	1	329 730	78



MOUNTING UNITS


Sanpress Mounting unit with SC-Contur

- press connections, Rp-threads
- long on one side

Components

EPDM sealing element, galvanised steel (flat) mounting bracket, long gunmetal or silicon bronze elbow (cuttable)

Model	d	Rp	L	DG	PU	Article	DG
2221	15	½	45	150/200	1	124 502	87
2221.1	15	½	45	80/100	1	135 119	87

DG = depth gauge


Sanpress Mounting unit with SC-Contur

- press connections, Rp-threads

Components

EPDM sealing element, short gunmetal or silicon bronze elbow, galvanised steel (offset) mounting bracket

Model 2222.6EX

d	Rp	DG	PU	Article	DG
12	¾	120	1	357 351	87

DG = depth gauge


Sanpress Mounting unit with SC-Contur

- press connections, Rp-threads

Components

EPDM sealing element, short gunmetal or silicon bronze elbow, galvanised steel (flat) mounting bracket

Model 2222.05

d	Rp	DG	PU	Article	DG
15	½	150	1	308 681	87

DG = depth gauge


Sanpress Mounting unit with SC-Contur

- press connections, Rp-threads

Components

EPDM sealing element, short gunmetal or silicon bronze elbow, galvanised steel (flat) mounting bracket

Model 2222.2

d	Rp	DG	PU	Article	DG
15	1/2	100	1	308 674	87

DG = depth gauge


Mounting unit

- for Junkers gas combination boilers
- press connections, Rp-threads

Components

gas connection elbow with threaded connection – all other elbows with press connection, short gunmetal or silicon bronze elbow, EPDM sealing elements, leaking water connection, galvanised steel (offset) mounting bracket

Note

When gas connection Rp3/4 or Rp1 is required, please replace the Rp1/2 elbow!

Model 2229

Rp	PU	Article	DG
1/2	1	309 398	87


Connection elbow 90°

- Rp-thread

Model 94477.0-713

Rp	PU	Article	DG
1/2	1	374 570¹	31
3/4	1	489 298¹	31
1	1	138 066²	31

¹⁾ gunmetal

²⁾ brass


Silenta Sound absorber

- rubber

Components

mounting bracket for wall mounting

Model 1415

DG	PU	Article	DG
150/200	5	123 345	31

DG = depth gauge

WALL LEAD-INS

Sanpress Wall lead-in with SC-Contur

- gunmetal or silicon bronze
- press connection, Rp-thread,
G-thread
- angled

Components

EPDM sealing element

Model 2232.1

d	Rp	G	L	PU	Article	DG
15	1/2	3/4	25	5	279 301	87
15	1/2	3/4	35	5	279 318	87
15	1/2	3/4	55	5	279 288	87
15	1/2	3/4	65	5	279 295	87


Sanpress Wall lead-in with SC-Contur

- gunmetal or silicon bronze
- press connection, Rp-thread,
G-thread

Components

EPDM sealing element

Model 2232.3

d	Rp	G	L	PU	Article	DG
15	1/2	3/4	30	5	325 060	87


Anti-twist protection

- for wall lead-in
- galvanised steel

Model 2132

PU	Article	DG
25	344 931	78



Mounting set
- for wall lead-in
- G-thread
Model 1526.414-897

G	SS	PU	Article	DG
3/4	29	10	104 887	24

SS = spanner size

SMARTLOOP INLINER TECHNOLOGY: INTERNAL CIRCULATION PIPES



Smartloop Connection set
- for hot water riser pipe with internal circulation pipe, hot water riser pipe from d28, circulation pipe d15
- gunmetal or silicon bronze
Components
plug, connection socket
Model 2276.1

d1	d2	d3	PU	Article	DG
28	12	15	1	470 289	78
35	12	15	1	470 272	78
28/35	12	15	1	632 229	78



Smartloop Pipe
- for internal circulation pipe
Model 2007.3

d	s	L [m]	PU	Article	DG
12	1	75	75	650 032	78



Smartloop Tension coupling
- for installation of the internal circulation pipe
Model 2276.9

for d	PU	Article	DG
12	1	632 236	78



Smartloop Coupling
- for repair of the internal circulation pipe
Model 2276.8

for d	PU	Article	DG
12	1	643 188	78



Pipe shear
- for Viega plastic pipe
Model 2040

for d	PU	Article	DG
12-25	1	117 047	74



Mounting pliers
Model 1077.2

for d	PU	Article	DG
12-16	1	264 604	74



Hand press tool
- for solid plastic pipe system, PB-system
Model 2782

for d	SI	PU	Article	DG
12	12	1	401 436	74

SI = for Smartloop



Press jaw PT2

for plastic piping systems

- recommended for Pressgun 6 Plus, Pressgun 6, Pressgun 6 B, Pressgun 5, Pressgun 4B, Pressgun 4E, press machine PT3-H/EH, PT3-AH, press machine type 2 (PT2), Geberit/Mepla press machines type PWH 75, type N 230 V and type N rechargeable battery, Geberit/Mapress press machines type EFP II, ACO 1, ECO 1, ECO 201, AFP 201, EFP 201, ACO 202 and ECO 202, Ridgid press machines RP 10-S, RP 10-B, RP 330C/330B, RP 340
- phosphatised steel

Model 2799.7

F	SI	PU	Article	DG
12	12	1	425 302	74

F = for Fonterra
SI = for Smartloop



Press jaw Picco

for plastic piping systems

- recommended for Pressgun Picco 6 Plus, Pressgun Picco 6, Pressgun Picco, battery-powered press machine Picco, Ridgid RP 210
- phosphatised steel

Model 2484.7

F	SI	PU	Article	DG
12	12	1	616 915	74

F = for Fonterra
SI = for Smartloop

COMPENSATORS



Compensator with SC-Contur

- for expansion equalisation in cellar or riser pipe, storey connection pipe in heating and sanitary technology
- press connections

Components

EPDM sealing elements, gunmetal or silicon bronze press connector, stainless steel bellows

Model 2251

d	PU	Article	DG
15	1	690 250	87
18	1	690 267	87
22	1	690 274	87
28	1	690 281	87
35	1	690 298	87
42	1	690 304	87
54	1	690 311	87

GUNMETAL SHUT-OFF VALVES, FROM 2017



Easytop Slanted seat valve (free-flow valve) with SC-Contur

- press connections

Components

valve casing and top made of gunmetal or silicon bronze in accordance with DIN EN 1982 and metal evaluation criteria (UBA) (German Federal Environmental Agency), stainless steel valve seat and valve plate unit, spindle transmission, position display open/closed, ergonomic handwheel and closed with medium marking green/red exchangeable, drain plug G $\frac{1}{4}$, EPDM sealing elements

Technical data

operating pressure max. 1.6 MPa (PN 16)

operating temperature max. 90 °C

with DVGW-test mark

Model 2237.5

DN	d	PU	Article	DG
15	15	5	756 864	95
15	18	5	756 871	95
20	22	5	756 888	95
25	28	5	756 895	95
32	35	1	756 901	95
40	42	1	756 918	95
50	54	1	756 925	95


**Easytop KRV slanted seat valve
(combined free-flow valve with
backflow preventer)
with SC-Contur**

- press connections

Components

valve casing and top made of gunmetal or silicon bronze in accordance with DIN EN 1882 and metal evaluation criteria (UBA) (German Federal Environmental Agency), stainless steel valve seat and valve plate unit, spindle transmission, position display open/closed, ergonomic handwheel and closed with medium marking green/red exchangeable, test connection, drain plug G $\frac{1}{4}$, EPDM sealing elements

Technical data

operating pressure max. 1.6 MPa (PN 16)

operating temperature max. 90 °C

with DVGW-test mark

Model 2238.5

DN	d	PU	Article	DG
15	15	5	757 199	95
15	18	5	757 205	95
20	22	5	757 212	95
25	28	5	757 229	95
32	35	1	757 236	95
40	42	1	757 243	95
50	54	1	757 250	95


**Easytop Backflow preventer
with SC-Contur**

- press connections

Components

valve casing and top made of gunmetal or silicon bronze in accordance with DIN EN 1882 and metal evaluation criteria (UBA) (German Federal Environmental Agency), stainless steel valve seat and valve plate unit, test connection, drain plug G $\frac{1}{4}$, EPDM sealing elements

Technical data

operating pressure max. 1.6 MPa (PN 16)

operating temperature max. 90 °C

with DVGW-test mark

Model 2239.4

DN	d	PU	Article	DG
15	15	5	757 526	95
15	18	5	757 533	95
20	22	5	757 540	95
25	28	5	757 557	95
32	35	1	757 564	95
40	42	1	757 571	95
50	54	1	757 588	95

GUNMETAL BALL VALVES

**Easytop Ball valve
with SC-Contur**

- press connections

Components

valve casing made of gunmetal or silicon bronze in accordance with metal evaluation criteria (UBA) (German Federal Environmental Agency), maintenance-free selector shaft (Viega recommends to open and close the ball valve completely every six months), black powder-coated metal actuating lever, EPDM sealing elements (press connections)

Technical data

operating pressure max. 1.6 MPa (PN 16)

operating temperature max. 110 °C

with DVGW-test mark

Model 2270.10

DN	d	PU	Article	DG
15	15	1	590 437	95
20	22	1	590 451	95
40	42	1	590 482	95

GUNMETAL BALL VALVES, FROM 2017



Easytop Ball valve with SC-Contur

- press connections
- Full Port

Components

silicon bronze valve casing in accordance with DIN EN 1982 and metal evaluation criteria (UBA) (German Federal Environmental Agency), maintenance-free selector shaft (Viega recommends to open and close the ball valve completely every six months), actuating lever T-form with medium marking green/red exchangeable, stainless steel ball, EPDM sealing elements (press connections)

Technical data

operating pressure max. 1.6 MPa (PN 16)
operating temperature max. 110 °C
[with DVGW-test mark](#)

Model 2275

DN	d	PU	Article	DG
15	15	1	746 377	95
15	18	1	746 384	95
20	22	1	746 391	95
25	28	1	746 407	95
32	35	1	746 414	95
40	42	1	746 421	95
50	54	1	746 438	95



Easytop Ball valve with SC-Contur

- press connections
- Full Port

Components

silicon bronze valve casing in accordance with DIN EN 1982 and metal evaluation criteria (UBA) (German Federal Environmental Agency), maintenance-free selector shaft (Viega recommends to open and close the ball valve completely every six months), actuating lever T-form with medium marking green/red exchangeable, stainless steel ball, EPDM sealing elements (press connections), drain plugs G $\frac{1}{4}$ on both sides with draining valve G $\frac{1}{4}$

Technical data

operating pressure max. 1.6 MPa (PN 16)
operating temperature max. 110 °C
[with DVGW-test mark](#)

Model 2275.3

DN	d	PU	Article	DG
15	15	1	746 681	95
15	18	1	746 698	95
20	22	1	746 704	95
25	28	1	746 711	95
32	35	1	746 728	95
40	42	1	746 735	95
50	54	1	746 742	95



Easytop Ball valve with SC-Contur

- press connection, Rp-threads
- Full Port

Components

silicon bronze valve casing in accordance with DIN EN 1982 and metal evaluation criteria (UBA) (German Federal Environmental Agency), maintenance-free selector shaft (Viega recommends to open and close the ball valve completely every six months), stainless steel ball, actuating lever T-form with medium marking green/red exchangeable, EPDM sealing element (press connection), polygon

Technical data

operating pressure max. 1.6 MPa (PN 16)
operating temperature max. 110 °C
[with DVGW-test mark](#)

Model 2275.4

DN	d	Rp	PU	Article	DG
15	15	$\frac{1}{2}$	1	746 759	95
15	18	$\frac{1}{2}$	1	746 766	95
20	22	$\frac{3}{4}$	1	746 773	95
25	28	1	1	746 780	95
32	35	1 $\frac{1}{4}$	1	746 797	95
40	42	1 $\frac{1}{2}$	1	746 803	95
50	54	2	1	746 810	95



Easytop Ball valve with SC-Contur

- not suitable for Easytop insulating shell model 2275.90
- silicon bronze
- press connections
- Full Port

Components


silicon bronze valve casing in accordance with DIN EN 1982 and metal evaluation criteria (UBA) (German Federal Environmental Agency), maintenance-free selector shaft (Viega recommends to open and close the ball valve completely every six months), actuating lever L shape, stainless steel ball, EPDM sealing elements (press connections)

Technical data

operating pressure max. 1.6 MPa (PN 16)
operating temperature max. 110 °C
with DVGW-test mark

Model 2275.10

DN	d	PU	Article	DG
15	15	1	774 851	95
15	18	1	774 868	95
20	22	1	774 875	95
25	28	1	774 882	95
32	35	1	774 899	95
40	42	1	774 905	95
50	54	1	774 912	95



FREE-FLOW VALVES, FROM 2017



Easytop Free-flow valve with SC-Contur

- press connections

Components

gunmetal or silicon bronze valve casing in accordance with DIN EN 1982 and metal evaluation criteria (UBA) (German Federal Environmental Agency), plastic turning handle, EPDM sealing elements (press connections)

Technical data

operating pressure max. 1.6 MPa (PN 16)
operating temperature max. 90 °C
with DVGW-test mark

Model 2278

d	PU	Article	DG
15	1	747 312	95
18	1	747 329	95
22	1	747 336	95

CONCEALED FREE-FLOW VALVES, CONCEALED STRAIGHT SEAT VALVES, FROM 2017



Easytop Concealed free-flow valve

with SC-Contur

- press connections

Components

valve casing and top made of gunmetal or silicon bronze in accordance with DIN EN 1982 and metal evaluation criteria (UBA) (German Federal Environmental Agency), upper part, site protection, EPDM sealing elements (press connections)

with DVGW-test mark

Model 2278.5

d	ID	PU	Article	DG
15	45-130	1	747 343	95
18	45-130	1	747 350	95
22	45-130	1	747 367	95

ID = installation depth



Easytop Concealed straight seat valve with SC-Contur

- press connections

Components

gunmetal or silicon bronze valve casing in accordance with DIN EN 1982 and metal evaluation criteria (UBA) (German Federal Environmental Agency), upper part, stainless steel valve seat and valve plate unit, site protection, EPDM sealing elements

with DVGW-test mark

Model 2235.2

DN	d	ID	PU	Article	DG
15	15	45–130	1/5	755 591	95
15	18	45–130	1/5	755 607	95
20	22	45–130	5	755 614	95
25	28	45–130	1/5	755 621	95

ID = installation depth



Easytop Equipment set

Visign for More 104

- for installation depth 45–130 mm
- suitable for Easytop concealed domestic water meter unit model 2231.03, 2231.04, 2231.13, 2231.14, 2231.3, 2231.4, Easytop concealed straight seat valve model 2235.2, 2235.3, Easytop concealed free-flow valve model 2278.5, 2278.6

Components

rosette, wall sealing, turning handle, red and blue marking rings

Model 2236.10

Version	PU	Article	DG
chrome-plated	1	596 835	95



Easytop Equipment set

- for installation depth 20–80 mm
- suitable for Easytop concealed domestic water meter unit model 2231.03, 2231.04, 2231.13, 2231.14, 2231.3, 2231.4, Easytop concealed straight seat valve model 2235.2, 2235.3, Easytop concealed free-flow valve model 2278.5, 2278.6

Components

rosette, wall sealing, turning handle

Model 2236

Version	PU	Article	DG
chrome-plated/red	1	275 068	95
chrome-plated/blue	1	275 075	95

MANIFOLDS, CROSS PIECES



Sanpress Screed manifold with SC-Contur

- for inaccessible area, piping crossing prevention
- gunmetal
- press connections

Components

insulating box L100xW160xH43 mm, EPDM sealing elements

Model 2252

d1	d2	d3	PU	Article	DG
22	10	22	1	364 298¹⁾	85
22	15	22	1	397 166	85

¹⁾ Press connection d10 should be carried out with a size 12 press jaw.



Sanpress Cross T-piece with SC-Contur

- for pipe crossing while keeping required construction height
- gunmetal
- press connections
- 2-part

Components

insulating box L160xW160xH50 mm, EPDM sealing elements

Model 2249.3

d1	d2	PU	Article	DG
15	15	1	493 325	85
22	15	1	493 356	85


Sanpress Cross piece with SC-Contur

- for pipe crossing on one floor while keeping the direction of the piping
- gunmetal or silicon bronze
- press connections

Components

EPDM sealing elements

Model 2244

d1	d2	PU	Article	DG
15	15	1	424 435	85
22	15	1	424 497	85


Sanpress Cross piece with SC-Contur

- gunmetal
- press connections

Components

EPDM sealing elements

Model 2248

d1	d2	PU	Article	DG
22	15	2	323 370	85
28	15	2	323 363	85


Sanpress Cross piece 24° with SC-Contur

- for going over riser pipes
- gunmetal
- press connections

Components

EPDM sealing elements

Model 2247

d1	d2	PU	Article	DG
22	15	5	325 978	85

RADIATOR CONNECTIONS

Radiator connection piece

- brass matt nickel-plated
- G-thread, Viega plug-in seat
- blockable, straight way valve

Components

polygon

Model 1096.5

G	DG	PU	Article	DG
¾	50	5	359 102	78

DG = depth gauge


Radiator connection piece

- brass matt nickel-plated
- G-thread, Viega plug-in seat
- blockable, angled

Components

polygon

Model 1097.5

G	DG	PU	Article	DG
¾	50	5	359 133	78

DG = depth gauge


Radiator connection piece

- brass matt nickel-plated
- G-thread, Viega plug-in seat
- conversion from double-pipe to single-pipe system, blockable, straight way valve

Components

polygon

Model 1096.0

G	DG	PU	Article	DG
¾	50	5	359 096	78

DG = depth gauge



Radiator connection piece

- brass matt nickel-plated
- G-thread, Viega plug-in seat
- conversion from double-pipe to single-pipe system, blockable, angled

Components

polygon

Model 1097.0

G	DG	PU	Article	DG	
¾	50	5	359 126	78	

DG = depth gauge



Adapter set

- for valve radiator connector to valve radiator with R½

- brass
- self-sealing

Model 1096.8

G1	G2	QS	PU	Article	DG	
½	¾	2	10	357 122	78	

QS = Quantity per set



Adapter set

- for valve radiator connector to valve radiator with R¾

Model 1096.9

QS	PU	Article	DG	
2	10	308 872	78	

QS = Quantity per set



Connection screw fitting

- for copper pipe, steel pipe
- brass nickel-plated
- Viega plug-in seat

Components

polygon

Model 94385.1

d	G	PU	Article	DG	
12	¾	10	112 608	78	
15	¾	10	105 358	78	



Adapter set

- for valve radiator with Rp½
- brass matt nickel-plated
- Viega plug-in seat

Components

polygon

Model 1022.6

R	G	QS	PU	Article	DG	
½	¾	2	1	153 687	78	

QS = Quantity per set



Adapter set

- for valve radiator with G¾ external thread

- in combination with adapter set model 1096.9

- brass matt nickel-plated
- Viega plug-in seat

Components

polygon

Model 1022.5

G1	G2	QS	PU	Article	DG	
¾	¾	2	1	137 342	78	

QS = Quantity per set


Radiator connection block


- for radiator connection out of the wall, radiator mounting after finishing all plastering, tiling, screed and painting work

Components

insulating box, stainless steel pipe
d15

Model 1097.6

d	H	PU	Article	DG
15	185	1	364 045	85
15	255	1	379 698	85


Radiator connection block

- for radiator mounting after finishing all plastering, tiling, screed and painting work, radiator connection out of the wall
- variable

Components

insulating box, stainless steel pipe
d15

Model 1097.9

d	H	PU	Article	DG
15	150	1	586 379	85


Radiator connection set


- brass matt nickel-plated
- blockable, angled

Components

screw fittings

Model 1097.7

d	G	PU	Article	DG
15	3/4	5	364 052	85


Radiator axial valve

- brass nickel-plated
- R-thread

Components

thermostat head, screw fitting for riser pipe, polygon

Model 1075.96

d	R	PU	Article	DG
15	1/2	1	360 405	78


Sanpress Return pipe screw fitting with SC-Contur

- gunmetal
- press connection, R-thread
- blockable

Components

EPDM sealing element

Model 2272.2

d	R	PU	Article	DG
15	1/2	1	326 364	85



Sanpress Return pipe screw fitting with SC-Contur

- gunmetal
- press connection, R-thread
- blockable

Components

EPDM sealing element

Model 2272.1

d	R	PU	Article	DG	
15	½	1	326 357	85	



Rosette

- for radiator connection with pipe d16, floor/wall covers

Model 1079.1

L	B	H	d	PU	Article	DG	
60	45	10	17	10	351 694	78	

B = width



Double rosette

- for radiator connection with pipe d16, floor/wall covers

Model 1079.3

L	B	H	d	DG	PU	Article	DG	
110	60	10	17	50	10	351 748	78	

B = width

DG = depth gauge



Rosette

- for radiator connection with radiator connection elbow/pipe or uncoated copper pipe, floor/wall covers

Model 1079.5

L	B	H	d	PU	Article	DG	
60	45	10	15	10	132 781	78	

B = width



Double rosette

- for radiator connection with radiator connection elbow/pipe or uncoated copper pipe, floor/wall covers

Model	L	B	H	d	DG	PU	Article	DG	
1079.6	110	60	10	15	50	10	135 959	78	
1079.7	110	60	10	15	40	10	264 581	78	

B = width

DG = depth gauge

SKIRTING BOARD RADIATOR CONNECTION PIECES



Skirting board radiator connection piece

- for valve radiator with lower connection, axial movement compensation up to 2 mm
- gunmetal


Components

connection elbow brass nickel-plated height-adjustable and 360° rotatable, screw fittings G $\frac{1}{2}$ x15, extended plug-in contour

Note

Radiator connection dimensions: distance to wall 65–140 mm, height 180–275 mm.

Model 2277.2



	PU	Article	DG
	1	662 509	85



Sanpress Plug adapter with SC-Contur

- for movement compensation up to 2 mm
- gunmetal
- press connections

Components

extended plug-in contour, EPDM sealing elements

Model 2233.5

d	PU	Article	DG
15	2	662 516	85
18	2	662 523	85
22	2	662 530	85



Plug adapter

- gunmetal or silicon bronze
- end closing piece

Model 2233.6

	PU	Article	DG
	2	663 346	85




Sanpress Radiator connection piece with SC-Contur

- for connection to standard or valve radiators
- gunmetal
- press connections, G-thread

Components

screw fittings, EPDM sealing elements

Model 2273.1

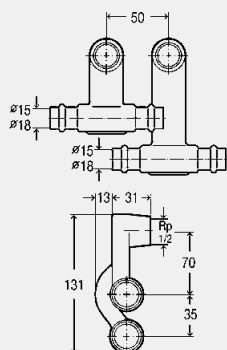

d1	G	d2	PU	Article	DG
15	$\frac{1}{2}$	15	1	446 628	85
18	$\frac{1}{2}$	18	1	446 635	85



Radiator connection set

- brass nickel-plated
- blockable, angled


Components

screw fittings for adapter set models 1022.6 and 1022.5

Model 2272.5

d	G	L1	L2	QS	PU	Article	DG	
15	3/4	121	123	2	1	360 399	85	

QS = Quantity per set



Connection elbow 90°

- for floor/wall connection
- stainless steel
- plug-in end

Model 2271.1

d	L1	L2	PU	Article	DG	
15	150	100	5	449 292	85	
15	350	100	1	366 056	85	

ACCESSORIES TOOLS



Deburrer

- for internal or external deburring, copper pipe, stainless steel pipe, Prestabo pipe
- steel

Model 2292.2

for d	PU	Article	DG
12–54	1	343 019	74



Deburrer

- for internal or external deburring, copper pipe, stainless steel pipe, Prestabo pipe
- steel

Model 2292.4XL

for d	PU	Article	DG
64.0–108.0	1	556 310	74



Insertion depth template

- for marking the insertion depth of metallic pipes

Model 2494

for d	PU	Article	DG
12–54	1	625 085	74



Marking pen

- for Viega press connector systems

Model 2490.1

	PU	Article	DG
	1	606 121	74

ACCESSORIES SEALING ELEMENTS



Sealing element

EPDM

- for potable water installation, heating installation
- temperature resistant to 110 °C

Model 2289

VdS	for d	internal-Ø	s	PU	Article	DG
	12	12.1	2.35	10	288 600	87
	14	14.1	2.5	10	448 370	87
	15	15.1	2.6	10	183 400	87
	16	16	2.6	10	448 387	87
	18	18.2	2.6	10	281 595	87
✓	22	22.2	3.1	10	183 523	87
✓	28	28.3	3.1	10	184 452	87
✓	35	35.4	3.25	10	181 208	87
✓	42	42.4	4.13	10	184 940	87
✓	54	54.4	4.13	10	191 153	87

VdS = VdS certification



Sealing element

EPDM

- for Sanpress Inox XL, Profipress XL, Prestabo XL, Temponox XL, potable water installation, heating installation
- temperature resistant to 110 °C

Model 2389XL

VdS	for d	internal-Ø	s	PU	Article	DG
✓	64.0	66.25	5	1	594 312	98

VdS = VdS certification



Sealing element EPDM

- for Sanpress XL, potable water installation, heating installation
- temperature resistant to 110 °C

Model 2289XL

for d	internal-Ø	s	PU	Article	DG
76.1	77	5	10	364 816	88
88.9	90	5	10	364 823	88
108.0	109	5	10	364 830	88



Sealing element FKM

- for areas of application with high temperatures e.g. district heat supply systems up to 140 °C and 1.6 MPa, low-pressure steam systems ≤ 120 °C and < 0.1 MPa, solar installations/vacuum pipes

Note

The Prestabo system is not suitable for low-pressure steam systems!

Use in any other area of application requires consultation with our Technical Consulting!

Model 2286

VdS	for d	internal-Ø	s	PU	Article	DG
	12	12.1	2.35	5	459 376	87
	15	15.1	2.6	5	459 390	87
	18	18.2	2.6	5	459 406	87
✓	22	22.2	3.1	5	459 413	87
✓	28	28.3	3.1	5	459 420	87
✓	35	35.4	3.25	5	459 437	87
✓	42	42.4	4.13	5	459 444	87
✓	54	54.4	4.13	1	459 451	87

VdS = VdS certification



Sealing element FKM

- for areas of application with high temperatures e.g. district heat supply systems up to 140 °C and 1.6 MPa, low-pressure steam systems ≤ 120 °C and < 0.1 MPa, solar installations/vacuum pipes

Note

The Prestabo system is not suitable for low-pressure steam systems!

Use in any other area of application requires consultation with our Technical Consulting!

Model 2386XL

VdS	for d	internal-Ø	s	PU	Article	DG
✓	64.0	66.25	5	1	614 461	98

VdS = VdS certification



Sealing element FKM

- for areas of application with high temperatures e.g. district heat supply systems up to 140 °C and 1.6 MPa, low-pressure steam systems ≤ 120 °C and < 0.1 MPa, solar installations/vacuum pipes, Sanpress XL

Note

Use in any other area of application requires consultation with our Technical Consulting!

Model 2286XL

for d	internal-Ø	s	PU	Article	DG
76.1	77	5	1	459 468	88
88.9	90	5	1	459 475	88
108.0	109	5	1	459 482	88

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: vag@nt-rt.ru || сайт: <https://viega.nt-rt.ru/>